




MODEL : SE


1.Kademe

Çevrim : 3.4.5.6.7.8.9.10

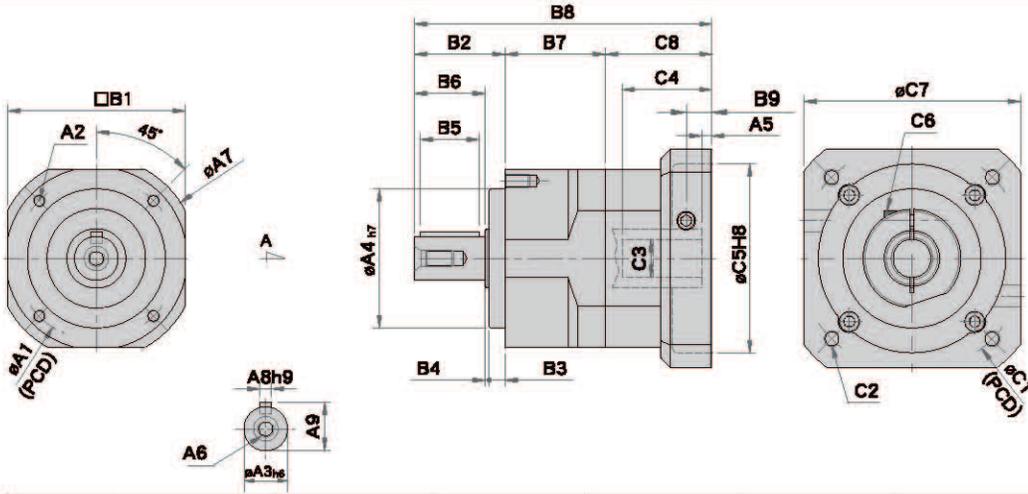

Birim : mm

Model Kod	44	62	90	120	142	180	220	
A	A1	44	62	82	110	140	184	218
	A2	M4 x P0.7	M5 x P0.8	M6 x P1.0	M8 x P1.25	M10 x P1.5	M12 x P1.75	M16 x P2.0
	A3	13	16	22	32	40	55	75
	A4	35	50	70	90	120	160	180
	A5	5	6	9	10	10	11.5	12.5
	A6	M4 x P0.7	M5 x P0.8	M8 x P1.25	M12 x P1.75	M16 x P2.0	M20 x P2.5	M20 x P2.5
	A7	50	70	102	134	166	215	252
	A8	5	5	6	10	12	16	20
	A9	15	18	24.5	35	43	59	79.5
B	B1	44	62	90	120	142	180	220
	B2	26	36	46	65	92	106	139
	B3	5	7	8	12	15	20	30
	B4	1	1	2	3	3	4	5
	B5	15	20	30	40	65	70	90
	B6	20	28	36	50	74	82	104
	B7	31.5	38	49	61	70	85	93
	B8	95	115	164.5	205	260.5	323.5	367.5
	B9	9	11.5	16	19.5	20	23.5	23.5
C	C1	46,63,60,90	70,75,90	90,100,115 145,165	145,165	145,200,215	200,215,235 265,300	235,265,300
	C2	M4 x P0.7 M5 x P0.8	M4 x P0.7 M5 x P0.8 M6 x P1.0	M6 x P1.0 M8 x P1.25 M10 x P1.5	M6 x P1.0 M8 x P1.25 M10 x P1.5	M8 x P1.25 M12 x P1.75	M12 x P1.75 M16 x P2.0	M12 x P1.75 M16 x P2.0
	C3	5,65, 6, 8,11	6,35,8,10,11 12,14, 16, 19	14,16,19,22,24	19,22,24,28,32	22,24,28,32 35,38	38,42,48,55	42,48,55
	C4	26	33.5	59	67	84.5	114.5	117.5
	C5	30,40,50,70	50,60,70	70,80,95 110,130	110,130	110,114.3,180	114.3,180,200 230,250	200,230,250
	C6	M3 x P0.5	M4 x P0.7 M5 x P0.8	M6 x P1.0	M8 x P1.25	M10 x P1.5	M10 x P1.5	M10 x P1.5
	C7	46,55,60,76	62,70,80	92,110,130,142	130,150	146,180,190	182,200,220 250,265	220,250,260
	C8	37.5	41	67.5	79	98.5	132.5	135.5

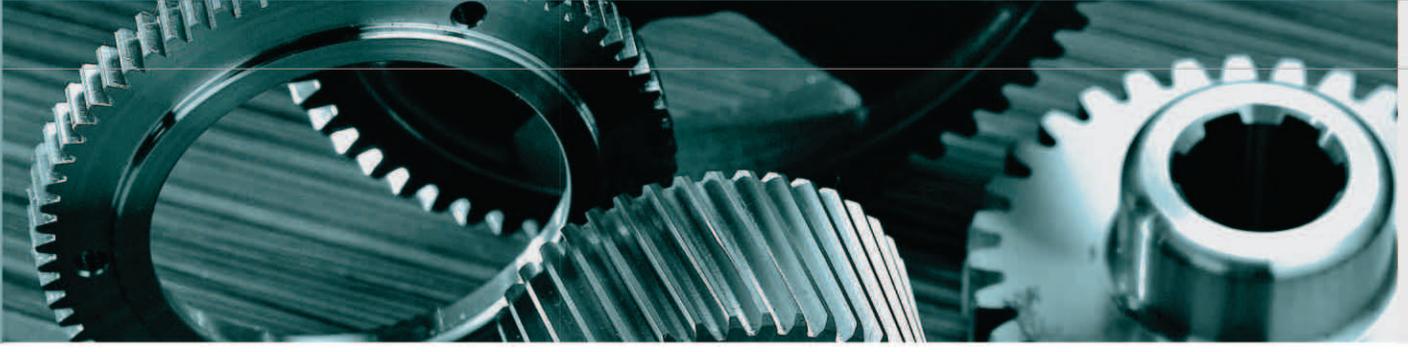

Model No.	BİRİM	ÇEVİRİM (TAHVİL)	#44	#62	#90	#120	#142	#180	#220
NOMİNAL ÇIKIŞ TORKU	Nm	3	19	59	165	335	625	1206	2030
		4	16	51	146	300	555	1069	1804
		5	16	48	160	333	618	1189	2010
		6	15	45	151	311	583	1118	1911
		7	15	45	149	309	573	1108	1870
		8	14	43	143	298	553	1070	1824
		9	13	44	145	278	516	993	1694
		10	14	43	141	294	549	1059	1779
MAX. ÇIKIŞ TORKU	Nm	3~10	3 x NOMİNAL ÇIKIŞ TORKU						
NOMİNAL GİRİŞ DEVRİ	rpm	3~10	5,000	5,000	4,000	4,000	3,000	3,000	2,000
MAX GİRİŞ DEVRİ	rpm	3~10	10,000	10,000	8,000	8,000	6,000	6,000	4,000
MİN BOŞLUK ORANI (Ps)	arcmin	3~10	-	-	≤1	≤1	≤1	≤1	≤1
DÜŞÜK BOŞLUK ORANI (P0)	arcmin	3~10	≤3	≤3	≤3	≤3	≤3	≤3	≤3
AZALTILMIŞ BOŞLUK ORANI (P1)	arcmin	3~10	≤5	≤5	≤5	≤5	≤5	≤5	≤5
STANDART BOŞLUK ORANI (P2)	arcmin	3~10	≤7	≤7	≤7	≤7	≤7	≤7	≤7
BURULMA DİRENCİ	Nm/arcmin	3~10	3	6	14	27	60	140	240
MAX. RADYAL YÜK	N	3~10	380	1,180	3,200	6,800	9,300	15,600	51,000
MAX. AKSİYAL YÜK	N	3~10	190	590	1,600	3,400	4,650	7,800	25,500
HİZMET ÖMRÜ	hr	3~10	30,000						
VERİM	%	3~10	≥97						
ÇALIŞMA SICAKLIĞI	°C	3~10	-25°C ~ +90°C						
YAĞLAMA		3~10	SENTETİK YAĞ						
REDÜKTÖR KORUMA DERECEŚİ		3~10	IP65						
MONTAJ POZİSYONU		3~10	HER YÖNDE						
SES SEVİYESİ	dB	3~10	≤56	≤58	≤60	≤63	≤65	≤67	≤70
AĞIRLIK ± 3%	Kg	3~10	0.58	1.23	3.4	7.88	15.05	29.16	39